

## KD-3轮机员报警系统 KD-3 Engineer alarm system

### 设备组成 Device Composition

序号 S/N	型号 Model	名称 Name	主要材质 Main material	重量 Weight	防护等级 IP class
1	6KD-3ZQ	6门轮机员报警主机(嵌入式) 6-way engineer alarm main unit(Flush type)	碳钢、合金铝 Carbon steel, Aluminum alloy	2.54Kg	IP20
2	6KD-3ZG	6门轮机员报警主机(壁挂式) 6-way engineer alarm main unit(Wall mount)	碳钢、合金铝 Carbon steel, Aluminum alloy	3.8Kg	IP22
3	12KD-3ZG	12门轮机员报警主机(壁挂式) 12-way engineer alarm main unit(Wall mount)	碳钢、合金铝 Carbon steel, Aluminum alloy	3.8Kg	IP22
4	12KD-3ZQ	12门轮机员报警主机(嵌入式) 12-way engineer alarm main unit(Flush type)	碳钢、合金铝 Carbon steel, Aluminum alloy	2.54Kg	IP20
5	KD-3FQ	轮机员报警分机(嵌入式) Engineer alarm extension(Flush type)	阻燃ABS Fire retardant ABS	0.3Kg	IP20
6	KD-3FG	轮机员报警分机(壁挂式) Engineer alarm extension(Wall mount)	阻燃ABS Fire retardant ABS	0.5Kg	IP44

### 轮机员报警主机 Engineer alarm main unit


#### 功能描述

满足最新规范要求。  
可外接6门分机或者12门分机。  
主机与分机可双向呼叫、对讲。  
主机可与所有分机通播对讲。  
一方呼叫另一方时有无源触点输出。

#### Function


Meet the requirements of rules.  
6 or 12 extensions could be connected.  
Mutual call and talkback could be carried out between main unit and extension.  
Main unit is capable of talkback with all extensions simultaneously.  
During calling, there is passive contact output.

### 6/12KD-3ZQ轮机员报警主机 Engineer alarm main unit

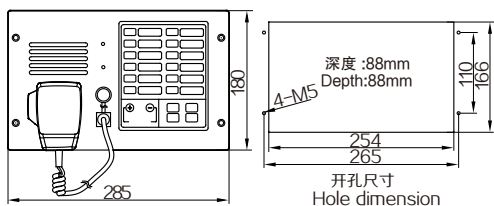

输出功率 Output power:  $\leq 20W$  (6门)  $\leq 40W$  (12门)  
呼叫及报警音声压级 Sound pressure level of calling and alarm: 80dB ~ 95dB  
主电源 Main power: DC24V<sup>+30%</sup><sub>-25%</sub>  
应急电源 Emergency power: DC24V<sup>+30%</sup><sub>-25%</sub>  
无源触点负载(阻性) Passive contact load(resistance): 8A/250VAC  
容量 Capacity: 6/12门  
颜色 Color: 亚光黑 matt black (RAL 9005)  
防护等级 IP class: IP20  
重量 Weight: 2.54Kg  
功耗 Power: 20W/35W

### 6/12KD-3ZG轮机员报警主机 Engineer alarm main unit

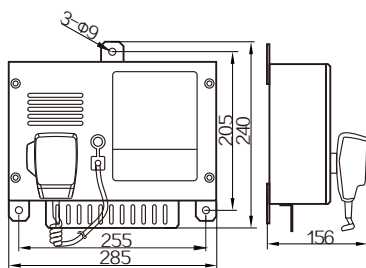

输出功率 Output power:  $\leq 20W$  (6门)  $\leq 40W$  (12门)  
呼叫及报警音声压级 Sound pressure level of calling and alarm: 80dB ~ 95dB  
主电源 Main power: DC24V<sup>+30%</sup><sub>-25%</sub>  
应急电源 Emergency power: DC24V<sup>+30%</sup><sub>-25%</sub>  
无源触点负载(阻性) Passive contact load(resistance): 8A/250VAC  
容量 Capacity: 6/12门  
颜色 Color: 亚光黑 matt black (RAL 9005)  
防护等级 IP class: IP22  
重量 Weight: 3.8Kg  
功耗 Power: 20W/35W

## 轮机员报警分机 Engineer Alarm Extension


### 功能描述

轮机员报警系统分机。  
分机与主机可双向呼叫。

### Function


Engineer alarm extension  
Mutual call could be carried out between  
Main unit and extension.

## KD-3FQ轮机员报警分机 Engineer Alarm Extension

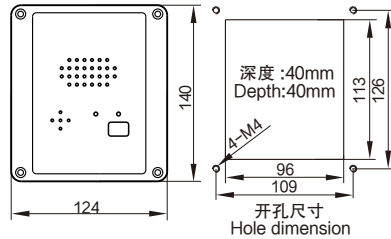

呼叫及报警音声压级  
Sound pressure level of calling and alarm:80dB ~ 95dB  
颜色Color:白色white ( RAL 1013 )  
防护等级 IP class:IP20  
重量 Weight:0.3Kg

## KD-3FG轮机员报警分机 Engineer Alarm Extension

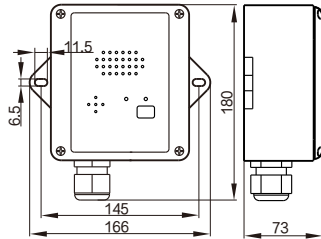

呼叫及报警音声压级  
Sound pressure level of calling and alarm:80dB ~ 95dB  
颜色Color:白色white ( RAL 1013 )  
防护等级 IP class:IP44  
重量 Weight:0.5Kg  
填料函进线孔径 Stuffing box cable entrance hole size:  
1-Φ14mm

## KD-3轮机员报警系统接线示意图 KD-3 Engineer alarm system connection diagram

